

# LABELX<sup>®</sup> JR

1

Automatic labeller for low and medium speed applications.




Available with max. label width: 140 mm - 250 mm

- Max. speed: **up to m/min: 30(140) - 25(250)**
- Max. label width: **max. 350 mm**
- Roll diameter: **300 mm**
- Approx dimensions: **800 x 500 x 350 mm**

EN

## STANDARD FEATURES


Hybrid step-motor low-loss A++ Class  
Mechanical unwinder  
Stop photocell  
End of roll alarm  
Electronic unit in separated box (EW-ER)  
Encoder in-put (EW electronic)  
Offset and start delay adjustment  
Automatic recovery of missing label  
Applied label counter  
Setting memorization (EW electronic)

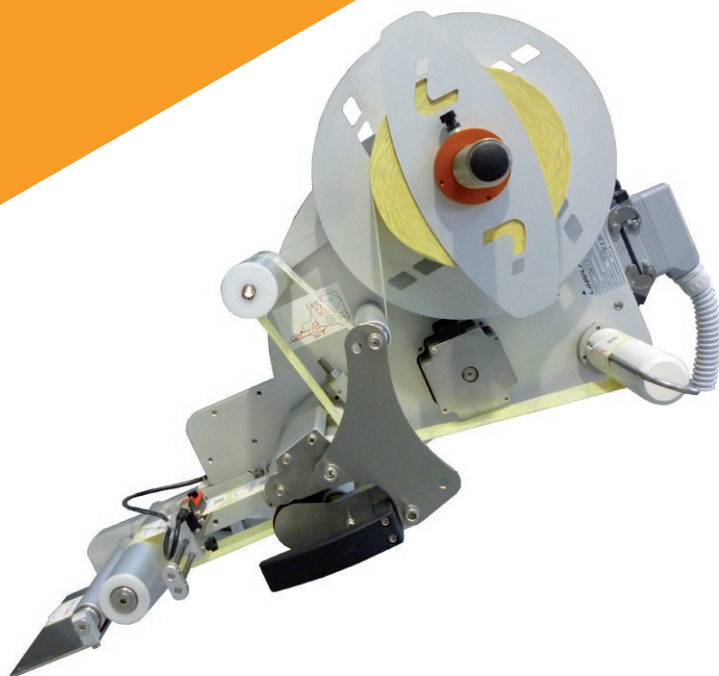

Pneumatic applicators



Thermal transfer printers



Hot foil coding units

## APPLICATIONS AREAS



## OPTIONAL ACCESSORIES

- Pre-end of labels roll alarm
- Photostop for transparent labels
- Start photocell
- Oscillating roller applicator
- Pneumatic applicators
- Hot foil coding unit
- Thermal transfer printing units